

# BPC-iMX8MP-05 Industrial Computer



## BPC-iMX8MP-05 Industrial Computer



### Overview:

BPC-iMX8MP-05 Industrial Computer is a compact and durable box PC that is powered by a DEBIX SOM A core board and a DEBIX SOM A I/O Board carrier board. It features a fanless design and a solid steel & aluminum enclosure, making it ideal for use in harsh industrial environments.

### Main Features:

- **Durable:** Solid steel and aluminum enclosure
- **Modular:** Utilizes DEBIX SOM A core board and DEBIX SOM A I/O Board carrier board for flexibility
- **Multiple boot options:** Support eMMC, Micro SD and SPI Nor Flash (reserved)
- **Software Compatibility:** Support Ubuntu, Yocto, Windows IoT, Debian, Android, OpenWRT and FreeRTOS operating systems
- **Powerful connectivity:** Include dual Gigabit network, 2.4GHz & 5GHz Wi-Fi, Bluetooth 5.0 and one Mini PCIe for 4G module/LoRa module/network card
- **Rich and isolated I/O:** 4 x USB 3.0, 2 x USB 2.0 and isolated interface: 2 x RS485, 1 x RS232, 2 x CAN, 2 x DI, 1 x DO

## Specification:

System	
Motherboard	DEBIX SOM A (Core Board) + DEBIX SOM A I/O Board (Carrier Board)
Boot	(1) Support boot from eMMC on DEBIX SOM A (default) (2) Support boot from Micro SD on carrier board (3) Support boot from SPI Nor Flash on carrier board (reserved)
Memory	Onboard 2GB LPDDR4 (1GB/4GB/8GB optional)
Storage	Onboard 16GB eMMC (8GB/32GB/64GB/128GB/256GB optional)
OS	Win10 IoT Enterprise, Ubuntu 22.04, Yocto-L6.1.22_2.2.0, Debian 12 (also supports Android, OpenWRT and FreeRTOS.)
Communication	
Gigabit Ethernet	2 x Independent MAC Gigabit Ethernet ports with POE power supply (need POE power device module) (one supports TSN)
Wi-Fi & Bluetooth	2.4GHz & 5GHz Wi-Fi and Bluetooth 5.0, external Wi-Fi&BT SMA antenna connector
Video & Audio	
Display	1 x HDMI output
Audio	1 x Headphone and mic combo port 1 x 4Pin L&R speaker
External I/O	
Antenna	2 x external SMA antenna connectors for Wi-Fi&BT (default) and 4G (optional)
DC IN	1 x Power socket, support 5.5mm x 2.1mm plug
USB 3.0	4 x USB 3.0 Host
USB 2.0	2 x USB 2.0 Host
Serial Ports	(1) 1 x I2C (2) 2 x Isolated CAN (3) 2 x Isolated RS485 (4) 1 x Isolated RS232 (5) 1 x UART
GPIO	(1) 2 x Isolated DI, support dry contact and wet contact (2) 1 x Isolated DO, support wet contact, compatible with dry contact of external relay
LED & KEY	(1) 1 x System LED (2) 1 x Power LED (3) 1 x ON/OFF
Internal I/O	
SIM Slot	1 x Built-in Micro SIM slot, push pop-up slot
SD Slot	1 x Built-in Micro SD slot, push pop-up slot
Mini PCIe	(1) Support 4G module such as Quectel 4G module, built-in SIM card, etc. (2) Support LoRa module (3) Support other expansion such as network card, SATA and serial port
Power Supply	
Power Input	Support DC 12V-36V
Mechanical & Environmental	
Enclosure Material	Steel and aluminum alloy
Dimension	192.70(W)mm x 41.60(H)mm x 124.00(D)mm (±0.5mm)
Gross Weight	830g (±0.5g)
Operating Temp.	-20°C to +70°C

Product Variant:


BPC-iMX8MP-05 (standard version) variant, see the table below for details.

Variant Name	Differences from Base Product
BPC-iMX8MP-05A	1. SIM slot was revised to external I/O 2. Support 3 external SMA antenna connectors for GPS, 4G and 4G-DIV


Certificates:



I/O Interfaces and Dimension:

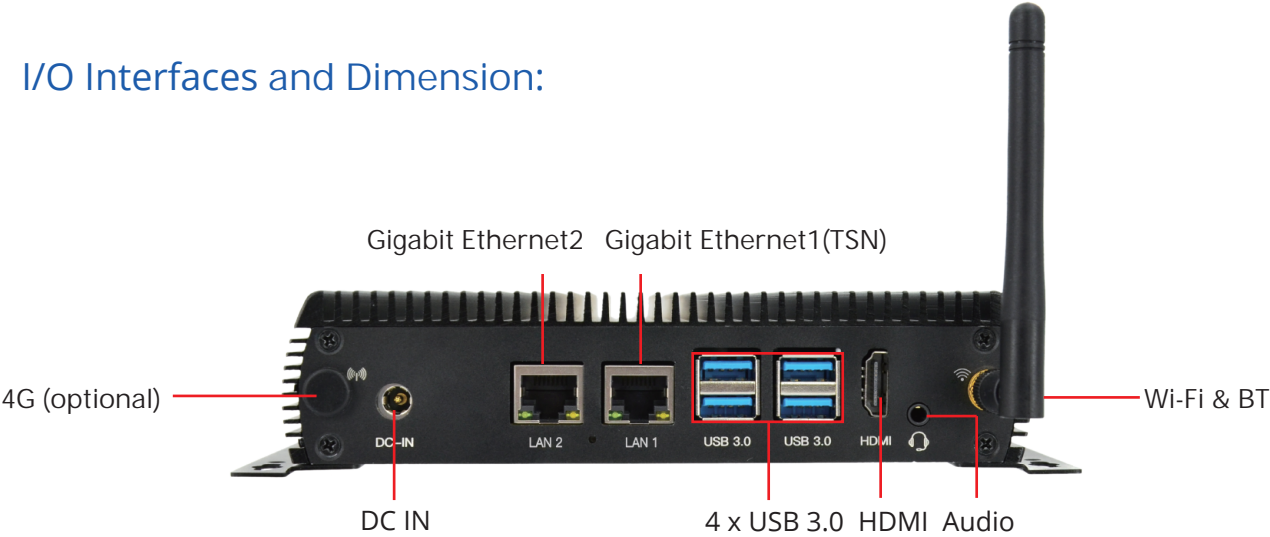


Back View of the BPC-iMX8MP-05 (standard version)

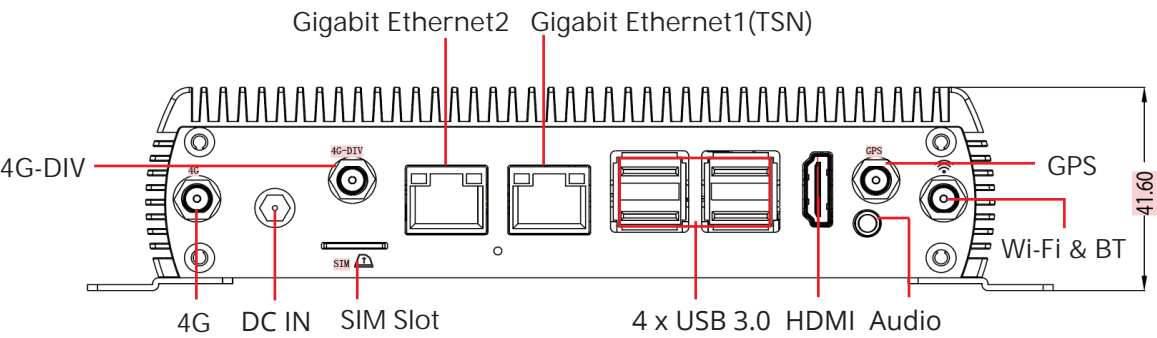


Back View of the BPC-iMX8MP-05A

I/O Interfaces and Dimension: (Contd)

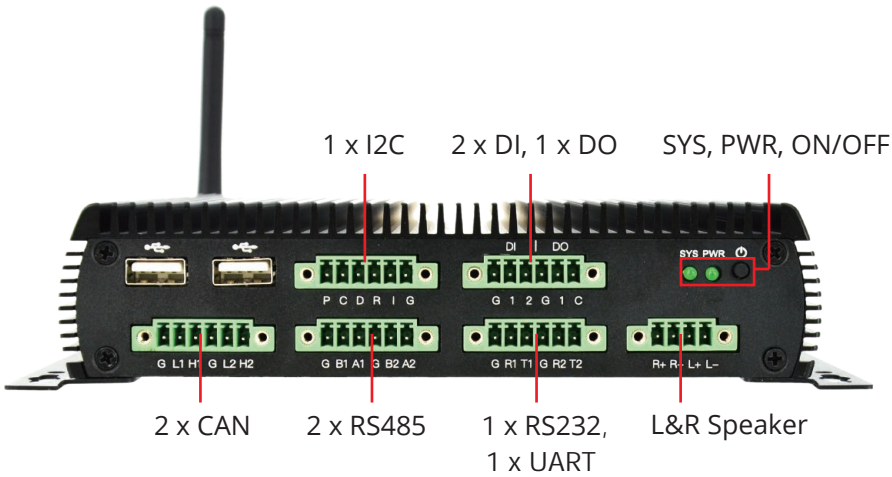

Front View

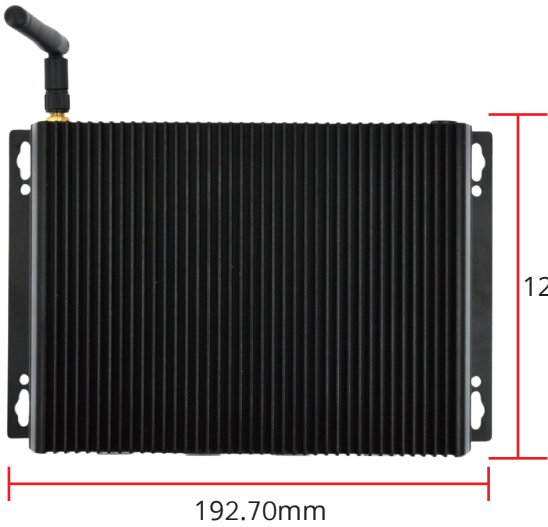

Top View



Side View

## Safety Instruction:

***To avoid malfunction or damage to this product please observe the following:***

- Disconnect the device from the DC power supply before cleaning. Use a damp rag. Do not use liquid detergents or spray-on detergents.
- Keep the device away from moisture.
- During installation, put the device on a reliable table. It will be damaged if you drop it.
- Before connecting the power supply, ensure that the voltage is in the required range.
- The air vent in the bottom of the enclosure is used for heat dissipation. To prevent the device from overheating, don't cover the hole.
- Put the power cable in place to avoid stepping on it.
- If the device is not used for a long time, power it off to avoid damage caused by sudden overvoltage.
- Do not pour liquid into the hole of the enclosure, as this could cause fire or electrocution.
- For safety reasons, the device can only be disassembled by professional personnel.
- Do not place the device in a place where the ambient temperature is below  $-20^{\circ}\text{C}$  or above  $70^{\circ}\text{C}$ . This will damage the machine. It needs to be kept in an environment at controlled temperature.

---

## Contact Us:

Headquarters: DEBIX Technology Inc., 8345 Gold River Ct., Las Vegas, NV 89113, USA

Factory: 5-6/F., East Zone, Shunheda A2 Building, Liuxiandong Industrial Park, Xili, Nanshan Dist., Shenzhen, China

Email: [info@debix.io](mailto:info@debix.io)

Website: [www.debix.io](http://www.debix.io)

Community: <https://discord.com/invite/adaHHaDkH2>

