

料号: PH40876A-R2×XX-XX

REV	ECN	MARK	DESCRIPTION	DATE

SPECIFICATIONS

Rated Current : 1.5AMP
 Contact Resistance: 20mΩ Max
 Withstanding Voltage: 500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature: -40° to +105°


STANDARD: PA6T

Contact Material: Brass
 Insulator Material: Polyester (UL 94V-0)
 Contact Plating: Au or Sn Over Ni
 Max Processing Temp: 230 °C for 30-60seconds
 (260°C for 10 seconds)




Ordering Information

PH4087 6 A - R 2 × ** - **
 ① ②③ ④⑤ ⑥ ⑦

- ①: PH4087: Series NO
- ②: 6: Right angle DIP Type
- ③: A: Plug
- ④: R: RoHS
- ⑤: 2: Double Row
- ⑥: PIN POS: 01:2POS ~ 40:80POS
- ⑦: Plating: 01:Gold Flash 02:1u" Gold 03:1.5u" Gold
 04:2u" Gold 05:3u" Gold 06:5u" Gold
 07:10U" Gold 08:15U" Gold 09:Tin

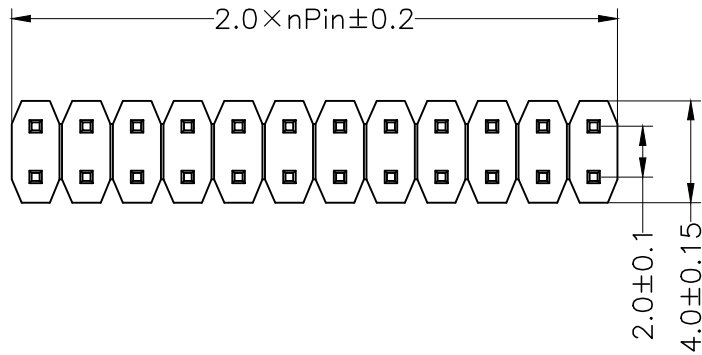

ITEM	PA	PC	H	L
Standard	3.9	2.8	2.0	8.7

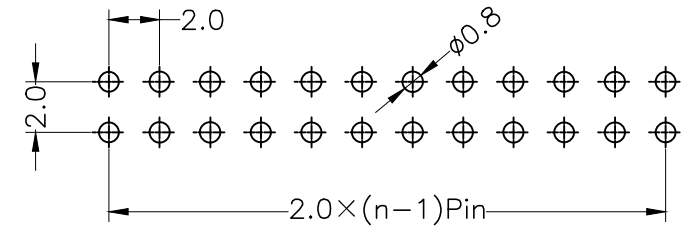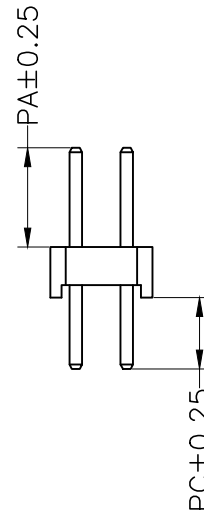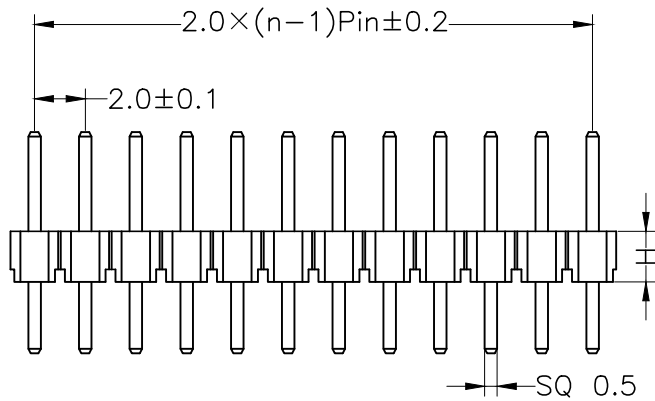

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

JRE 深圳市锦润电子科技有限公司
 SHENZHEN JINRUN ELECTRONICS TECHNOLOGY CO.,LTD

比例
SCALE
N/A

单位
UNIT
mm

一般公差 GENERAL TOLERANCE		
***	± 0.05	± 0.5°
**	± 0.10	± 1°
*	± 0.20	± 2°
	± 0.30	± 5°

投影法
PROJECTION METHOD

绘图
DR.
ZHOU BING
2012.03.30

校图
CHK.
FU LONG
2012.03.30

核准
APPD.
YANG BINGQIANG
2012.03.30

版本:
REV. A
页码:
PAGE 1 of 1

品名: PH2.0Pitch 2XnPin
TITLE H2.0 180° DIP
料号:
P/N. PH40876A-R2×XX-XX