

Portal A Wireless Gateway



Portal A Wireless Gateway



Overview:

The Portal A is a versatile wireless gateway that offers seamless connectivity and reliable performance. It supports various network options, including Wi-Fi, Gigabit Ethernet, and optional modules like LoRa and 4G. The Portal A is ideal for IoT applications requiring long-range, low-power communication.

Main Features:

- High-performance Quad Core Cortex-A55 CPU up to 1.8GHz
- Built-in Wi-Fi, Gigabit Ethernet, and optional LoRa, 4G, and GPS modules for diverse network options
- Convenient set-up and easy management using a mobile phone
- Expand coverage range with an optional LoRa antenna
- Support OTA automatic update, stable and reliable


Specification:

System	
CPU	RK3566, 4 x ARM Cortex-A55, 1.8GHz, comes with an integrated neural processing unit(NPU) that delivers 1TOPS of performance.
Memory	4GB LPDDR4
Storage	64GB eMMC
Clipper Chip	ATECC608
OS	Debian, Ubuntu
Communication	
LAN	1 x Gigabit Network
LoRa	1 x LoRa module (optional), support 470MHz, 868MHz and 915MHz
WIFI & BT	1 x WIFI & BT module
4G	1 x 4G module (optional)
GPS	1 x GPS module (optional)
I/O Interfaces	
SIM	1 x SIM slot
Button	1 x Bluetooth Pairing Button
USB	1 x USB 3.0
LED	1 x System LED, 1 x Status LED
Antennas	1 x Wifi Antenna (2.4GHz,3dBi), 1 x LoRa Antenna (optional, 4dBi, 1 m extension cable, with a strong magnetic chuck), 1 x 4G Antenna (optional), 1xGPS Antenna (optional)
RTC	1 x RTC
Mechanical & Environmental	
Material	Aluminum alloy
Dimension	158mm x 107.5mm x 24.5mm (±0.5mm)
Net Weight	348g (±0.5g)
Operating Temp.	0°C to 70°C
Power Supply	
Power Input	DC 12V/2A

Certificates:



I/O Interfaces:

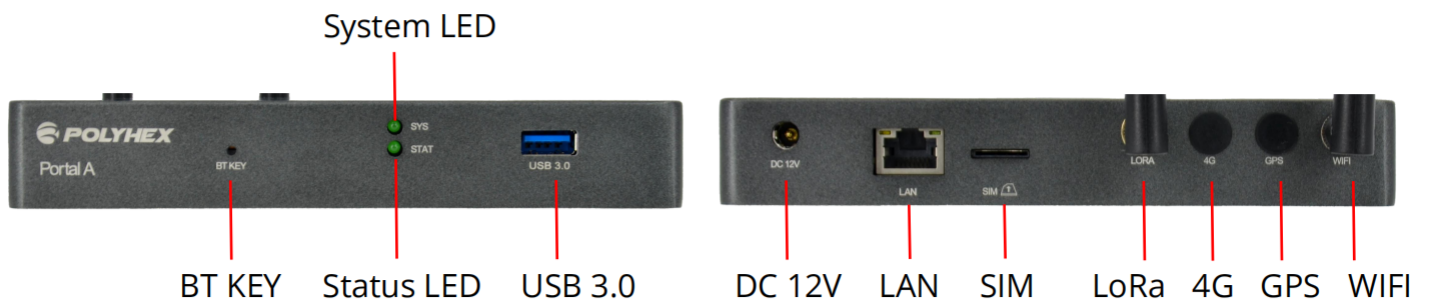

Antennas:



Safety Instruction:

To avoid malfunction or damage to this product please observe the following:

- Disconnect the device from the DC power supply before cleaning. Use a rag. Do not use liquid detergents or spray-on detergents.
- Keep the device away from moisture.
- During installation, put the device on a reliable table. It will be damaged if you drop it.
- Before connecting the power supply, ensure that the voltage is in the required range.
- Put the power cable in place to avoid stepping on it.
- If the device is not used for a long time, power it off to avoid damage caused by sudden overvoltage.
- For safety reasons, the device can only be disassembled by professional personnel.
- Do not place the device in a place where the ambient temperature is below 0 °C or above 70 °C. This will damage the machine. It needs to be kept in an environment at controlled temperature.

Contact Us:

Headquarters: DEBIX Technology Inc., 8345 Gold River Ct., Las Vegas, NV 89113, USA

Factory: 5-6/F., East Zone, Shunheda A2 Building, Liuxiandong Industrial Park, Xili, Nanshan Dist., Shenzhen, China

Email: info@debix.io

Website: www.debix.io

Community: <https://discord.com/invite/adaHHaDkH2>

