


# DEBIX R3568-01

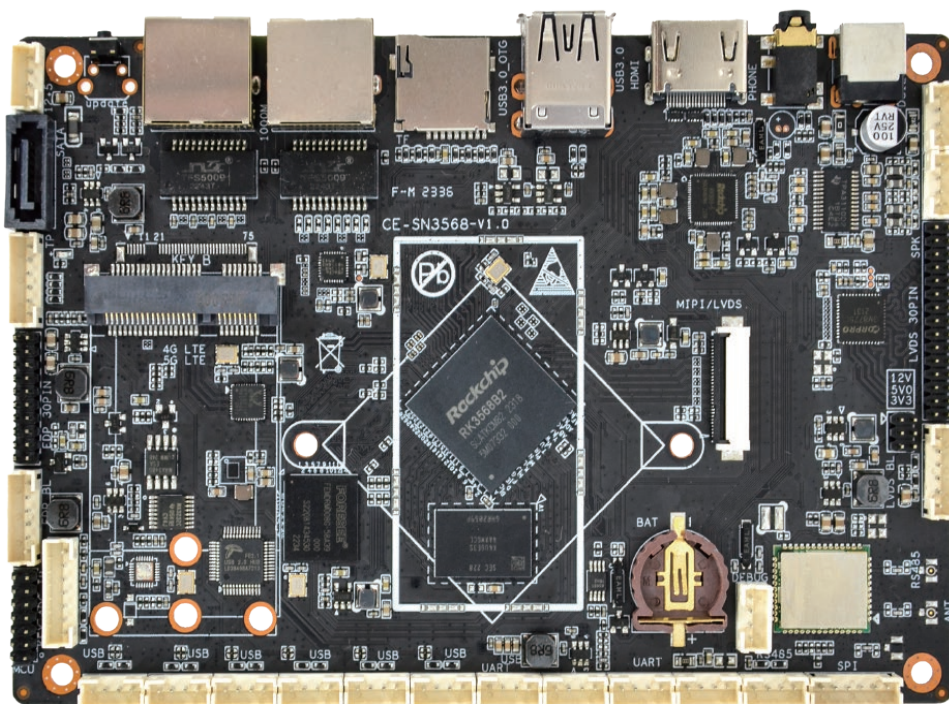


## DEBIX R3568-01 Single Board Computer

### Overview:

DEBIX R3568-01 is a single board computer based on Rockchip RK3568B2 quad-core Cortex-A55 processor, can be widely used in industrial control, energy and electricity, intelligent medical devices, instruments and apparatus, and security monitoring, etc.

### Main Features:



- Quad-core 64bit Cortex-A55 up to 2.0GHz;
- 1 TOPS NPU;
- Mali-G52 GPU with high-performance 2D accelerator, supports OpenGL ES 1.1/ 2.0/ 3.2, OpenCL 2.0 and Vulkan 1.1;
- Multimedia:
  - (1) Supports 4K 60fps H.265/ H.264/ VP9 video decode;
  - (2) Supports 1080P 60fps H.265/ H.264 video encode;
  - (3) Supports 8M ISP, HDR.
- Display:
  - (1) Supports asynchronous display;
  - (2) Multiple video input/output interfaces, including eDP/ HDMI2.0/ MIPI/ LVDS/ 24bit RGB/ EBC.
- Rich interfaces, including USB2.0/ USB3.0/ PCIE3.0/ PCIE2.1/ SATA3.0/ QSGMII.

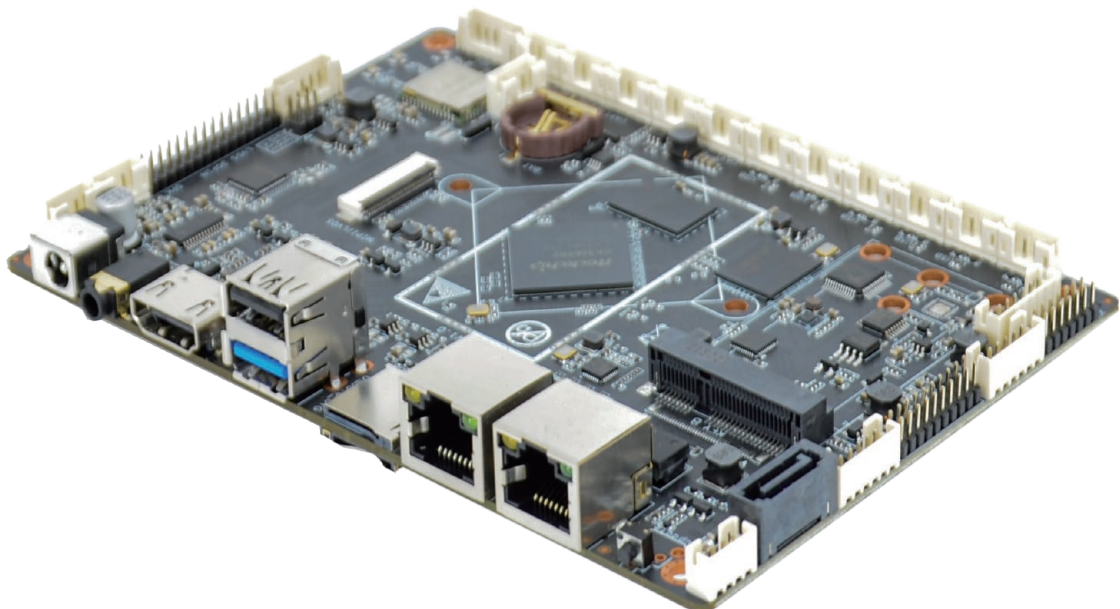

## Specification:

System	
CPU	Rockchip RK3568B2, 4 x Cortex-A55 2.0GHz, comes with an integrated neural processing unit (NPU) that delivers up to 1.0 TOPS.
Memory	1) Default: 2GB LPDDR4X (4GB/8GB optional) 2) 2GB/4GB/8GB LPDDR4 optional
Storage	Onboard 8GB eMMC (16GB/32GB/64GB/128GB/256GB optional) Expansion: Micro SD card (8GB/16GB/32GB/64GB/128GB/256GB optional)
OS	Android 13, Yocto-L6.6.23_2.0.0 , Debian 12
Boot	Boot from eMMC
Communication	
Ethernet	2 x 10/100/1000Mbps RJ45 Ethernet ports
Wi-Fi & BT	2.4GHz & 5GHz Wi-Fi, bluetooth 5.0, external Wi-Fi SMA antenna connector
Video & Audio	
HDMI	1 x HDMI output
LVDS	1 x LVDS 1 x LVDS backlight control 1 x LVDS power
MIPI DSI/LVDS	1 x MIPI DSI/LVDS
EDP	1 x EDP 1 x EDP backlight control
Audio	1 x 3.5mm headphone and mic combo 1 x 4Pin SPK
Other I/O Interfaces	
USB	6 x USB 2.0 Host 1 x USB 3.0 OTG & USB 2.0
Debug	1 x Debug
UART	4 x UART (RS232/TTL)
RS485	1 x RS485
SPI	1 x SPI
TP	1 x TP
SATA	1 x SATA 1 x SATA power 5V/12V
Mini PCIe/M.2	(1) 1 x Mini PCIe 4G (2) 1 x PCIe, M.2 B-KEY (optional) (Notice: You can only choose the MiniPCIe slot or the M.2 slot)
Card Slots	1 x Micro SD slot 1 x Micro SIM slot
MCU	1 x MCU
RTC	1 x RTC
Infrared Ray	1 x IR+Key
DC Power	1 x DC power socket 1 x Internal power
Power Supply	
Power Supply	DC 12V/3A power input for default
Mechanical	
Dimensions	148.0mm(L) x 103.0mm(W)
Weight	104g
Operating Temp.	0°C to 70°C, commercial grade

I/O Interface:

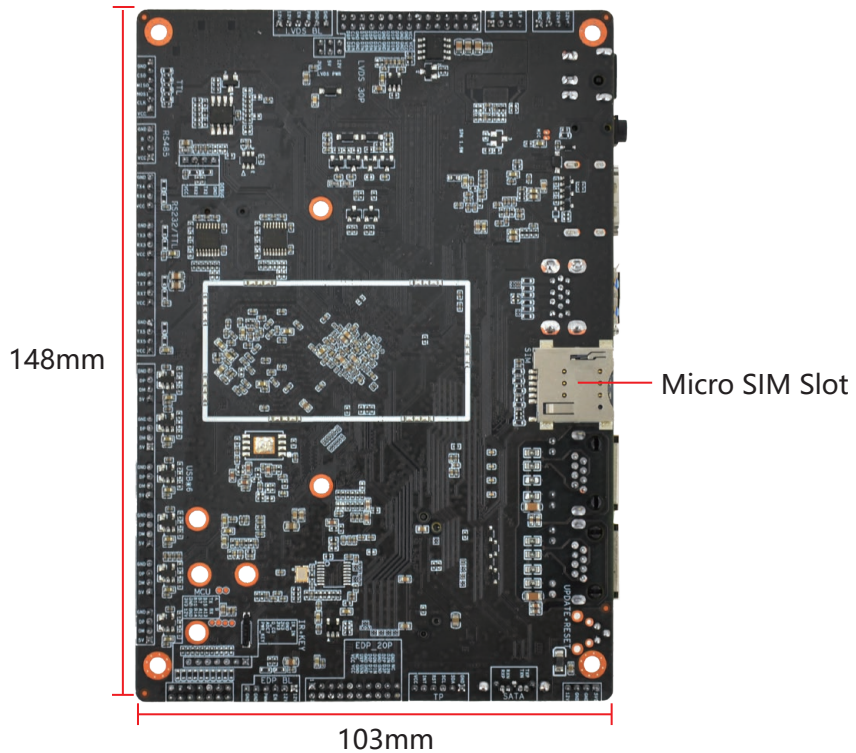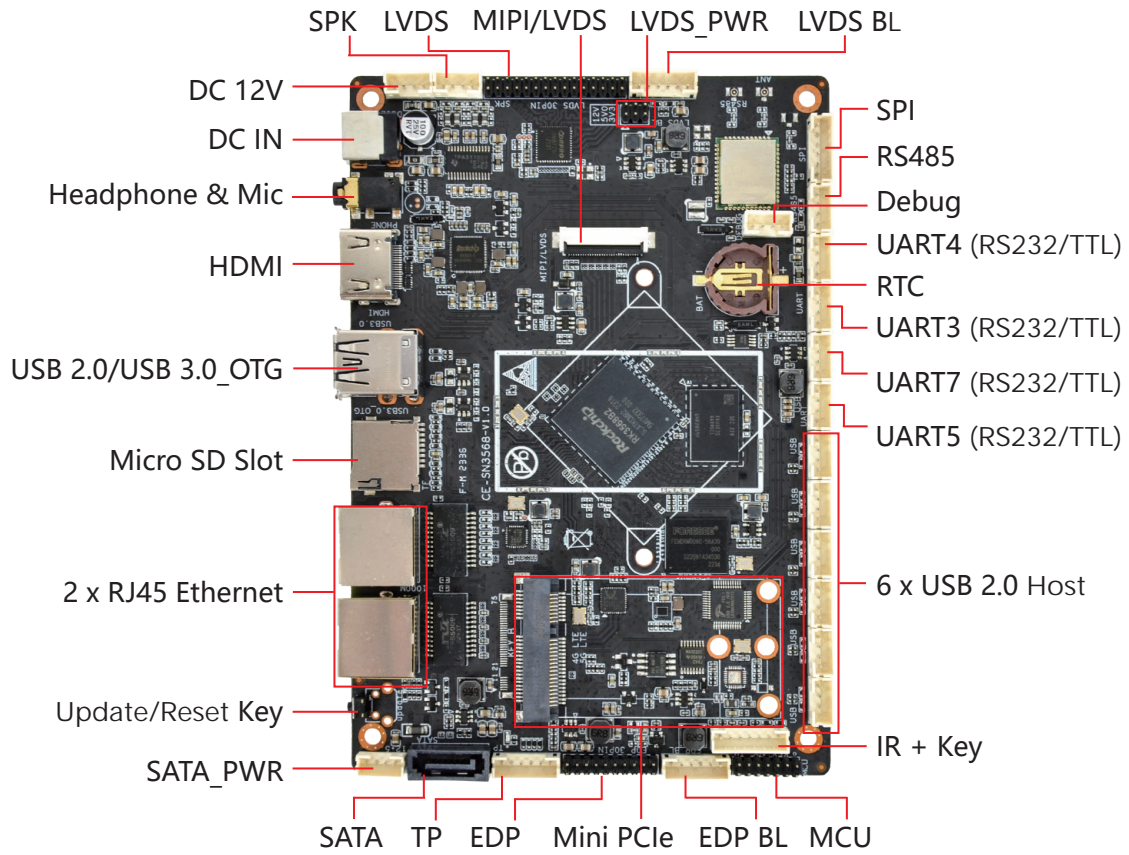



## Safety Instruction and Warnings :

### **General :**

- Avoid exposure to water, moisture, and conductive surfaces while operating.
- Handle with care to avoid mechanical or electrical damage to the circuit board and connectors.
- Only handle the board by the edges when powered on to minimize the risk of electrostatic discharge damage.

### **Power :**

- Use only a 12V/3A DC minimum external power supply that complies with relevant regulations and standards for your country.

### **Environment:**

- Operate in a well-ventilated environment, even if using a case.
- Place on a stable, flat, non-conductive surface and avoid contact with conductive items.

### **Connections :**

- Use peripherals that comply with relevant standards for the country of use and ensure proper insulation and operation.

### **Additional notes :**

- This summary is not exhaustive, please refer to the full User Manual for details.
- If you are unsure about any aspect of safety or operation, consult a qualified professional.

---

## Contact Us:

Headquarters: DEBIX Technology Inc., 8345 Gold River Ct., Las Vegas, NV 89113, USA  
Factory: 5-6/F., East Zone, Shunheda A2 Building, Liuxiangdong Industrial Park, Xili, Nanshan Dist., Shenzhen, China  
Email: [info@debix.io](mailto:info@debix.io)  
Website: [www.debix.io](http://www.debix.io)  
Community: <https://discord.com/invite/adaHHaDkH2>

