

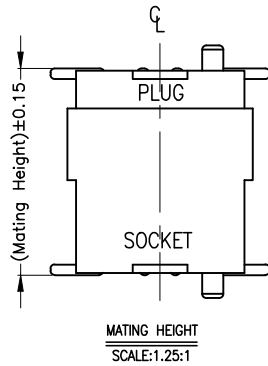


料号: BB51024A-RXX-XX-32





REV	ECN	MARK	DESCRIPTION	DATE
A1		△	产品料号修正	2022-7-19

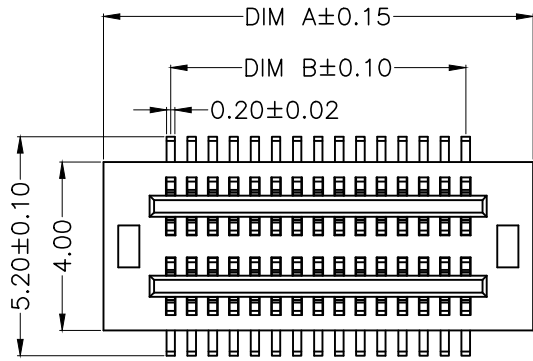

- NOTES:
- Housing: PA9T High-temp Thermoplastic  
UL94V-0 Color: Black
  - Terminal: Phosphor Bronze  
Plating: 1U" Gold Flash  
Overall 50~100U" Nickel Under Plated.
  - Voltage Rating: 60V DC
  - Current Rating: 0.5A MAX. (EACH PIN)
  - Operating Temperature: -25°C TO +85°C

Ordering Information  
BB5102 4 A - R \*\* - \*\* - 32  
① ② ③ ④ ⑤ ⑥

- ①: BB5102: Series No
- ②: 4: R/A SMT Type
- ③: A: Plug
- ④: R: RoHS
- ⑤: PIN POS:  
04:4Pos~100:100Pos
- ⑥: Height: 08-H0.8 13-H1.3  
10-H1.0 20-H2.0

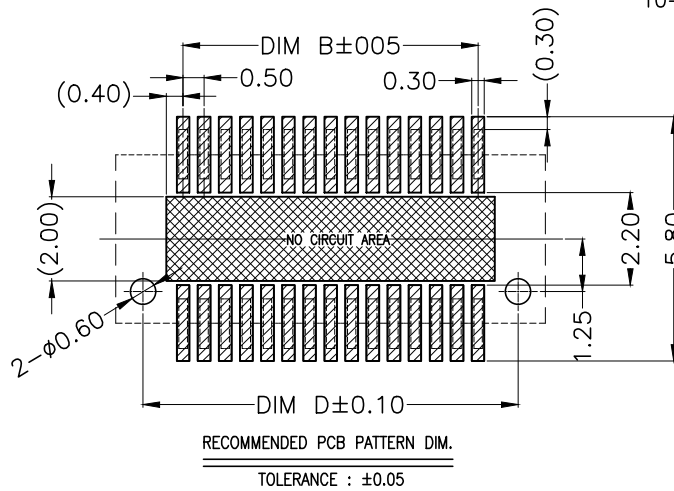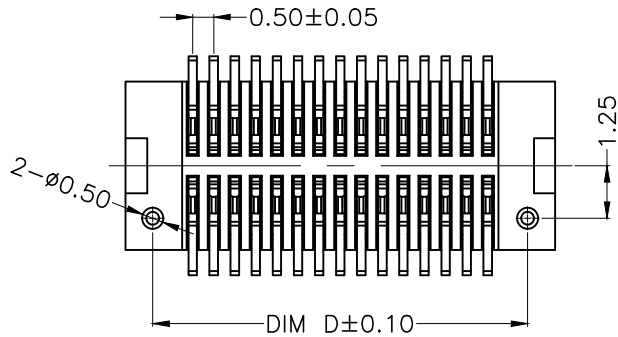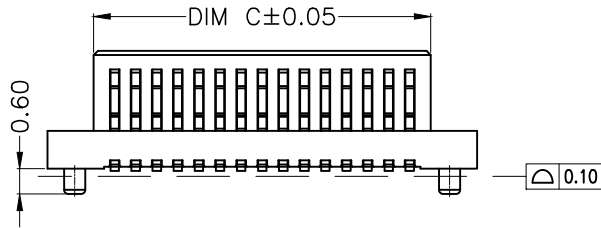

PIN	A	B	C	D
4	3.70	0.50	1.50	2.40
6	4.20	1.00	2.00	2.90
8	4.70	1.50	2.50	3.40
10	5.20	2.00	3.00	3.90
12	5.70	2.50	3.50	4.40
14	6.20	3.00	4.00	4.90
16	6.70	3.50	4.50	5.40
18	7.20	4.00	5.00	5.90
20	7.70	4.50	5.50	6.40
22	8.20	5.00	6.00	6.90
24	8.70	5.50	6.50	7.40
26	9.20	6.00	7.00	7.90
28	9.70	6.50	7.50	8.40
30	10.20	7.00	8.00	8.90
32	10.70	7.50	8.50	9.40
34	11.20	8.00	9.00	9.90
36	11.70	8.50	9.50	10.40
38	12.20	9.00	10.00	10.90
40	12.70	9.50	10.50	11.40
42	13.20	10.00	11.00	11.90
44	13.70	10.50	11.50	12.40
46	14.20	11.00	12.00	12.90
48	14.70	11.50	12.50	13.40
50	15.20	12.00	13.00	13.90
52	15.70	12.50	13.50	14.40
54	16.20	13.00	14.00	14.90
56	16.70	13.50	14.50	15.40
58	17.20	14.00	15.00	15.90
60	17.70	14.50	15.50	16.40
62	18.20	15.00	16.00	16.90
64	18.70	15.50	16.50	17.40
66	19.20	16.00	17.00	17.90
68	19.70	16.50	17.50	18.40
70	20.20	17.00	18.00	18.90
72	20.70	17.50	18.50	19.40
74	21.20	18.00	19.00	19.90
76	21.70	18.50	19.50	20.40
78	22.20	19.00	20.00	20.90
80	22.70	19.50	20.50	21.40
82	23.20	20.00	21.00	21.90
84	23.70	20.50	21.50	22.40
86	24.20	21.00	22.00	22.90
88	24.70	21.50	22.50	23.40
90	25.20	22.00	23.00	23.90
92	25.70	22.50	23.50	24.40
94	26.20	23.00	24.00	24.90
96	26.70	23.50	24.50	25.40
98	27.20	24.00	25.00	25.90
100	27.70	24.50	25.50	26.40

MATING HEIGHT	PLUG(H.)	SOCKET(H.)	E
3.0	0.8	2.2	1.6
3.5	1.3	2.2	1.6
4.0	1.0	3.0	1.9
4.5	1.0	3.5	1.9
5.0	1.0	4.0	1.9
5.5	1.0	4.5	1.9
6.0	2.0	4.0	1.9
6.5	2.0	4.5	1.9

<p>深圳市锦润电子科技有限公司 SHENZHEN JINRUN ELECTRONICS TECHNOLOGY CO.,LTD</p>	比例 SCALE	单位 UNIT	一般公差 GENERAL TOLERANCE	投影法 PROJECTION METHOD	绘图 DR.	校图 CHK.	核准 APPD.	版本: REV.	品名: TITLE	料号: P/N.
	1:1	mm	*** ± 0.05   ± 0.5° ** ± 0.15   ± 1° * ± 0.25   ± 2° * - - -   ± 3°		ZHENG ZEHUI 2015-11-18	S K Y	QI JIANHUA 2015-11-18	A	BTB0.5Pitch Double Slot PLUG	